

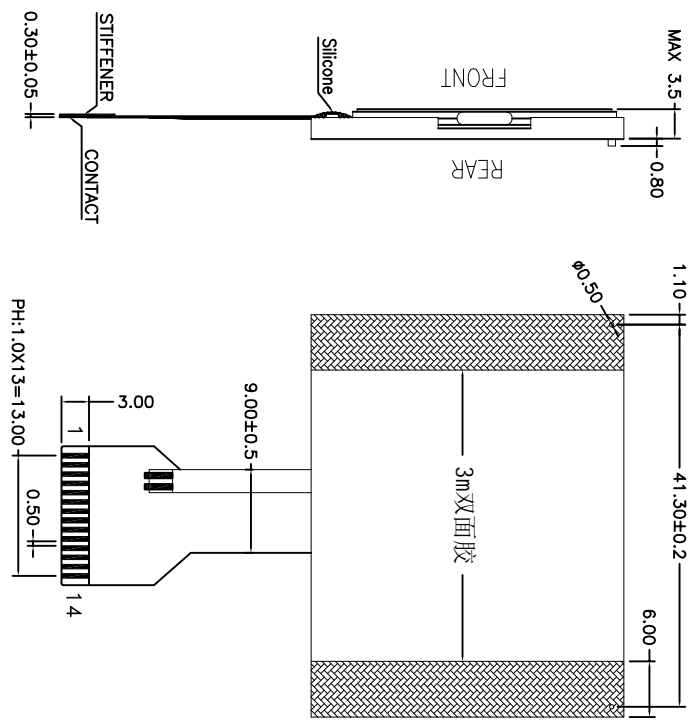
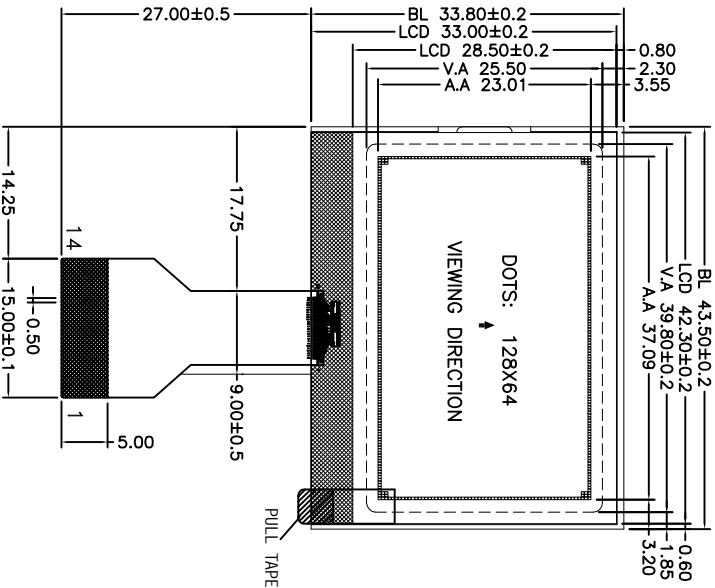



All Pages Of This Edition Approved
Signature: _____ Date: _____

REV.	DESCRIPTION	REVISER	DATE
A0	First Issue	WZQ	2018.07.14



INTERFACE	DESCRIPTION
1	LED+
2	LED-
3	CS0
4	RST
5	CD
6	SCK
7	SDA
8	VDD
9	GND
10	VB0+
11	VB0-
12	VB1-
13	VB1+
14	VLCD



- Specifications:
1. Display Mode: FSTN/Transflective/Positive.
 2. Viewing Angle: 6 0'clock.
 3. Drive Method: 1/64 Duty, 1/9 Bias, Vop=8.3V, Vdd=3.0V.
 4. Top: -20°C~+70°C, Tst: -30°C~+80°C.
 5. Connector: COG+FFPC.
 6. Drive IC: UC1701X
 7. Backlight: 3PCS WHITE LED(3V/<45MA).
 8. With " * " Mark Dimensions Are Important Dimensions.

深圳市睿熙电子有限公司

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODEL NUMBER:	PROJECTION	SHEET:	1 OF 1
DESIGN BY:	WZQ	2018.07.14	ENH-DG128064-112-YFPHGF	DO NOT SCALE THIS DRAWING.	DATE:	2018.07.14	
CHECKED BY:							
CUSTOMER P.N.:	"sepoint" 甲						