
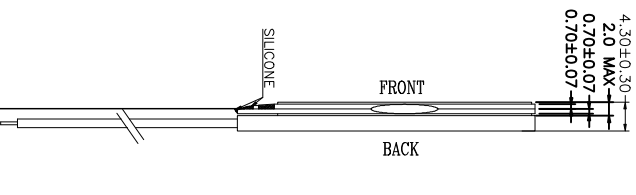


All Pages Of This Edition Approved




Signature: _____

Date: _____

REV.	DESCRIPTION	REVISER	DATE
A0	First Issue	luojinwei	2016.08.15

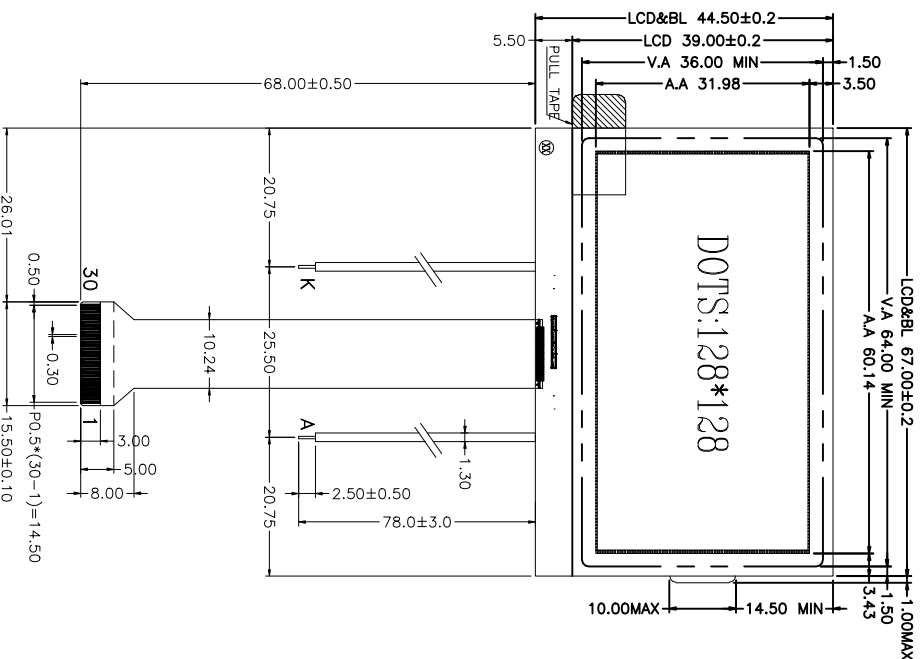

PIN	SYMBOL	PIN	SYMBOL
1	NC	16	D5
2	NC	17	D6
3	PS0	18	D7
4	PS1	19	VDD1
5	PS2	20	VDDA
6	CSB	21	VSS
7	RST	22	VM
8	A0	23	V0
9	R/W	24	XV0
10	E	25	VD1
11	D0	26	VG
12	D1	27	VPP
13	D2	28	VE
14	D3	29	NC
15	D4	30	NC



BACKLIGHT CIRCUIT
3PCS WHITE LEDS
SCALE 20:1
LCD LAYOUT

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

Specifications:

1. Display Mode: FSTN/Transflective/Positive.
2. Viewing Angle: 6:00'clock.
3. Drive Method: 1/128 Duty, 1/12 Bias, Vop=12.0V, Vdd=3.0V.
4. Top: -20°C~+70°C, Tst: -30°C~+80°C.
5. Connector: COG+FPIC.
6. Drive IC: ST7571
7. Backlight: 3PCS WHITE LEDS, If=60mA & Vf=3.0±0.10V
8. With" * " Mark Dimensions Are Important Dimensions.

深圳市睿显熙电子有限公司

Unspecified Tolerances:	±0.20	UNITS: mm	DATE:	MODEL NUMBER:	ENH-DG1280128-03	DO NOT SCALE THIS DRAWING.	PROJECTION	SHEET:	1 OF 1
DESIGN BY:	Shiven	2016.08.15							
CHECKED BY:								DATE:	2016.08.15
CUSTOMER P/N:	ENH-DG1280128-03								