


Signature: _____


Date: _____

REV.	DESCRIPTION	REVISER	DATE
A0	First issue	luojinwei	2017.02.22

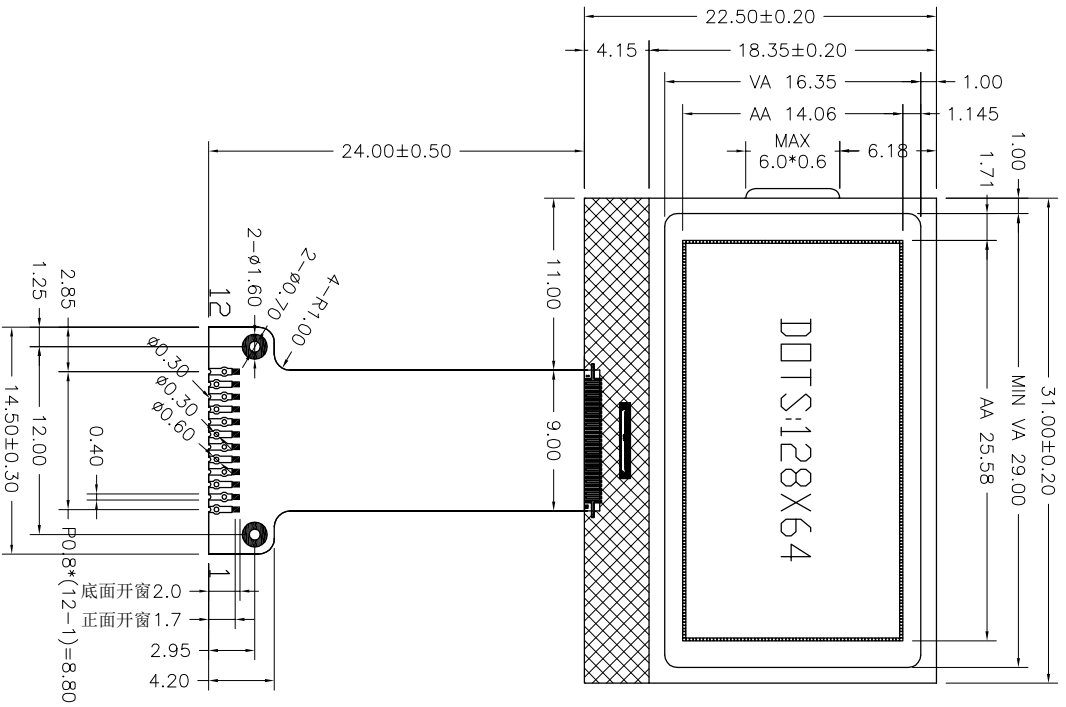


由 Autodesk 教育版产品制作


- Specifications:
1. Display Mode: FSTN/Transmissive/Positive.
 2. Viewing Angle: 6 0'clock.
 3. Drive Method: 1/64 Duty 1/9 Bias, Vop = 8.9V, Vdd = 3.0V.
 4. Top: -10°C~+60°C, Tst: -20°C~+70°C.
 5. Connector: COG+FPIC.
 7. Drive IC: ST7567
 8. With " * " Mark Dimensions Are Important Dimensions.

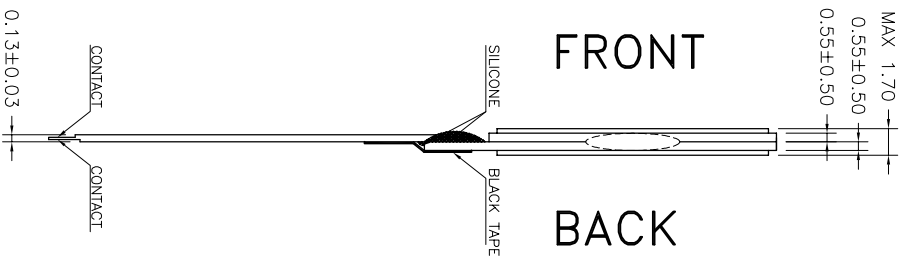


PIN	SYMBOL
1	/CS1
2	/RES
3	A0
4	D6(SCLK)
5	D7(SDA)
6	VDD
7	VSS
8	V0
9	XV0
10	VG
11	NC
12	NC



DOTS SIDE SCALE 20:1



LCD LAYOUT



SHENZHEN ENRICH ELECTRONICS CO., LTD.

TEL: +86-755-27864416, FAX: +86-755-27864653

Unspecified Tolerance: ±0.20	UNITS: mm	DATE: 2017.02.22	MODEL NUMBER: ENH-DG128064-66-NFP7GF	PROJECTION	SHEET: 1 OF 1
DESIGN BY: luojinwei	CHECKED BY:	DATE: 2017.02.22	DO NOT SCALE THIS DRAWING.	DATE: 2017.02.22	